




CAME
AUTOMATIC GATES

ประตูอัตโนมัติ



Dimensions

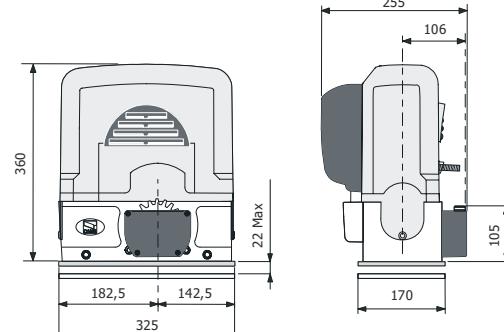

SLC-2200 BK

Exclusively practical. SLC-2200 BK features the PRA TICO SYSTEM, an extremely user-friendly Came patented device which replaces the laborious, manual release procedures required during a power outage, and does away with the hassle of searching for the keys.



Advantages of SLC-2200 BK

The Bk is the top when it comes to service and safety. When total power, performance and reliability are needed, the SLC-2200 Bk technology enables the operator to reach its full potential. For example, the "self-diagnostics of the safety circuits" which blocks the system from working if one of the photocells or sensitive edges malfunctions; and the "auxiliary lighting of the driving area", which is directly controlled by the electronic card.




Receiver
AF43S 433.92 MHZ
Plug-in radiofrequency card.



Easy coding.
TAM-432SA lets you memo -
rise codes from "transmitter
to transmitter" through its
radio-encoding function.
So you can easily generate
copies if you have the origi -
nal.

Tam

Remote control radio command



Elegance, design and technology for multi-user applications.

In just 12 grams* Came has concentrated all of its technology and know-how by making a transmitter that offers 16 million code combinations, standard multi-user function, and practicality, all in one handy transmitter. *(0,42 oz)

Standard multi-user mode.
All of the models can emit dif -
ferentiated codes per key.
Excellent for those applica -
tions where multi-user mode is
a must, such as in apartment
block settings.

Advantages of 433,92 MHz Tam

Tam is a complete series of 4 models, ranging from 2 to 8 channels, all in multi-user mode and fitted with encoding for 16 millions possible combina -
tions. The receivers to be coupled come in 6 models, from the snap-in cards for Came panels with built-in radio decoding to the outer-type 2 or 4 channel cards – even with multi-code storing. The RBE4MT receiver allows you to manage and store up to 999 different transmitter codes, thus simplifying multi-user management.

Technical features

Type	SLC-2200 BK
Protection rating	IP54
Power supply (V) (50/60Hz)	230 A.C.
Motor power supply (V) (50/60Hz)	230 A.C.
Current draw (A)	5,1
Power (W)	580
Manoeuvre speed (m/min - ft/s)	10,5/0,57
Duty cycle (%)	50
Thrust (N)	1500
Motor's thermo-protection (°C/F)	150/302
Operating temperature (°C/F)	-20 - +55 / -4 - +131

Type	TAM-432SA
Frequency (MHz)	433,92
Batteries	2 x CR2016 Lithium
Dimensions (mm/in)	24 x 68 x 12,5 / 0,94 x 2,67 x 0,49
Combinations	16,777,216
Operating temperature (°C/F)	-20 - +55 / -4 - +131
Material	ABS
Weight (g/oz)	12/0,42